





OLS1000ERT2U/OLS1500ERT2U  
OLS2000ERT2U/OLS3000ERT2U



### TRUSTWORTHY ONLINE UPS TO PROTECT IT EQUIPMENT



### The high-quality online double-conversion UPS that offers the ideal power protection

Designed for office and data center applications, the Online S Series adopts double-conversion topology to provide seamless Pure Sine Wave output. The UPSs are compatible with generators to prolong power continuity. The products also adopt ECO Mode to help save on energy costs, Smart Battery Management (SBM) to extend battery lifespan, and multifunction LCD readout to display precise information. The power management software allows users to easily control and monitor the UPS system.

#### APPLICATION



- SOHO Office
- Back Office
- Data Center
- Factory
- Train Station
- Office
- Server Room
- Supermarket
- Airport

#### SERIES FEATURES

- Online (Double Conversion) UPS Topology
- Generator Compatible
- Smart Battery Management (SBM)
- Phone/Fax/Modem/DSL/Network Protection
- Emergency Power Off (EPO) Port
- SNMP/HTTP Remote Management Capability (Optional)
- Energy Saving Technology
- Zero Transfer Time
- Extended Battery Module (EBM)
- LCD Status Display
- PowerPanel® Management Software
- Rack/Tower Convertible Configurations

#### PRODUCT CALLOUTS

1. Power On/Off Switch
2. LCD Display Panel
3. Function Button(s)
4. Battery Backup & Surge Protected Outlets
5. Communication Protection Ports RJ11/RJ45
6. Input Circuit Breaker
7. Output Circuit Breaker
8. AC Inlet
9. Serial Port
10. USB Port
11. SNMP/HTTP Network Slot
12. Extended Battery Module Connector
13. EPO Port

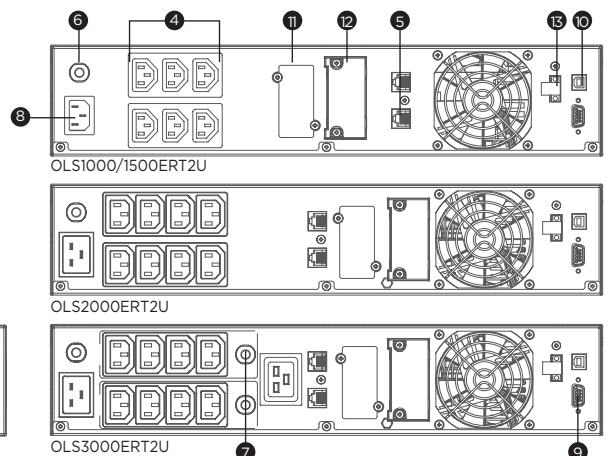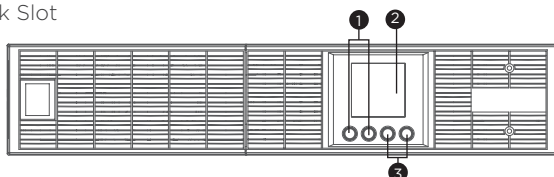

## TECHNICAL SPECIFICATIONS

Model Name	OLS1000ERT2U	OLS1500ERT2U	OLS2000ERT2U	OLS3000ERT2U
<b>General</b>				
UPS Topology	Online Double Conversion	Online Double Conversion	Online Double Conversion	Online Double Conversion
Energy Saving Technology	Online ECO Mode Efficiency > 95%	Online ECO Mode Efficiency > 95%	Online ECO Mode Efficiency > 95%	Online ECO Mode Efficiency > 95%
Active PFC Compatibility	Yes	Yes	Yes	Yes
<b>Input</b>				
Generator Compatibility	Yes	Yes	Yes	Yes
Nominal Input Voltage (Vac)	230 ± 10%	230 ± 10%	230 ± 10%	230 ± 10%
Input Voltage Range (Vac)	160 - 300	160 - 300	160 - 300	190 - 300
Input Frequency (Hz)	50 ± 10, 60 ± 10	50 ± 10, 60 ± 10	50 ± 10, 60 ± 10	50 ± 10, 60 ± 10
Input Frequency Detection	Auto-sensing	Auto-sensing	Auto-sensing	Auto-sensing
Rated Input Current (A)	4.5	6.5	9	13
Input Power Factor	0.98	0.98	0.98	0.98
Input Connector Type	IEC C14	IEC C14	IEC C20	IEC C20
<b>Output</b>				
Capacity (VA)	1000	1500	2000	3000
Capacity (Watts)	900	1350	1800	2700
On Battery Waveform	Pure Sine Wave	Pure Sine Wave	Pure Sine Wave	Pure Sine Wave
On Battery Voltage(s) (Vac)	208 ± 1%, 220 ± 1%, 230 ± 1%, 240 ± 1%			
Output Voltage Setting	Configurable	Configurable	Configurable	Configurable
On Battery Frequency (Hz)	50 ± 0.5%, 60 ± 0.5%	50 ± 0.5%, 60 ± 0.5%	50 ± 0.5%, 60 ± 0.5%	50 ± 0.5%, 60 ± 0.5%
Output Frequency Setting	Configurable	Configurable	Configurable	Configurable
Power Factor	0.9	0.9	0.9	0.9
Overload Protection	Internal Current Limiting, Circuit Breaker, Fuse			
Overload Protection (Line Mode)	110-120% Load for 1 min, >120% Load Immediately			
Overload Protection (Battery Mode)	110-120% Load for 10 sec, >120% Load Immediately			
Overload Protection (Bypass Mode)	>130% Load Immediately			
Harmonic Distortion (Linear Load)	THD < 3%	THD < 3%	THD < 3%	THD < 3%
Harmonic Distortion (Non-linear Load)	THD < 5%	THD < 5%	THD < 5%	THD < 5%
Outlet(s) - Total	6	6	8	9
Outlet Type	IEC C13 x 6	IEC C13 x 6	IEC C13 x 8	IEC C19 x 1, IEC C13 x 8
Outlet(s) - Battery & Surge Protected	6	6	8	9
Typical Transfer Time (ms)	0	0	0	0
<b>Battery</b>				
Runtime at Half Load (min)	15	14	15	14
Runtime at Full Load (min)	5	4	5	4
Typical Recharge Time (Hours)	5	5	5	5
Smart Battery Management (SBM)	Yes	Yes	Yes	Yes
User-replaceable	Yes	Yes	Yes - Qualified Personnel Only	Yes - Qualified Personnel Only
Hot-swappable	Yes	Yes	Yes	Yes
Battery Type	Sealed Lead-acid	Sealed Lead-acid	Sealed Lead-acid	Sealed Lead-acid
Replacement Battery Pack	RBPO066	RBPO067	RBPO069	RBPO070
RBP Quantity (pcs)	1	1	1	1
Extended Battery Module (EBM)	BPSE36V45ART2U	BPSE36V45ART2U	BPSE72V45ART2U	BPSE72V45ART2U
Max. EBM Quantity (pcs)	3	3	3	3
<b>Surge Protection &amp; Filtering</b>				
Surge Suppression (Joules)	440	440	440	440
EMI/RFI Filtration	Yes	Yes	Yes	Yes
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out	1-in, 1-out	1-in, 1-out	1-in, 1-out
<b>Management &amp; Communications</b>				
LCD Panel	Yes	Yes	Yes	Yes
HID Compliant USB Port(s)	1	1	1	1
Serial Port	RS232	RS232	RS232	RS232
Emergency Power Off (EPO) Port	Yes	Yes	Yes	Yes
Power Management Software	PowerPanel® Business Edition	PowerPanel® Business Edition	PowerPanel® Business Edition	PowerPanel® Business Edition
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205	Yes - with optional RMCARD205	Yes - with optional RMCARD205	Yes - with optional RMCARD205
<b>Physical</b>				
Form Factor	Rack/Tower	Rack/Tower	Rack/Tower	Rack/Tower
<b>Physical Size - UPS Module</b>				
Dimensions (WxHxD) (mm.)	438 x 88 x 430	438 x 88 x 430	438 x 88 x 610	438 x 88 x 610
Weight (kg.)	13.2	14.6	21.2	27.6
Installed Rack Height (U)	2	2	2	2
<b>Environmental</b>				
Operating Temperature (°C)	0 - 40	0 - 40	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	20 - 90	20 - 90	20 - 90	20 - 90
Online Thermal Dissipation (BTU/hr)	342	420	666	1126
<b>Certifications</b>				
Certifications*	CE, EAC, RCM, LOA	CE, EAC, RCM, LOA	CE, EAC, RCM, LOA	CE, EAC, RCM, LOA
RoHS	Yes	Yes	Yes	Yes

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.